



PRODUCT CATALOGUE

AUSROCK
— DRILLING TOOLS —

OVERVIEW


CONTENT

DTH Hammer1

DTH Drill Bit19

DTH Drill Pipe22

Top Hammer.....23

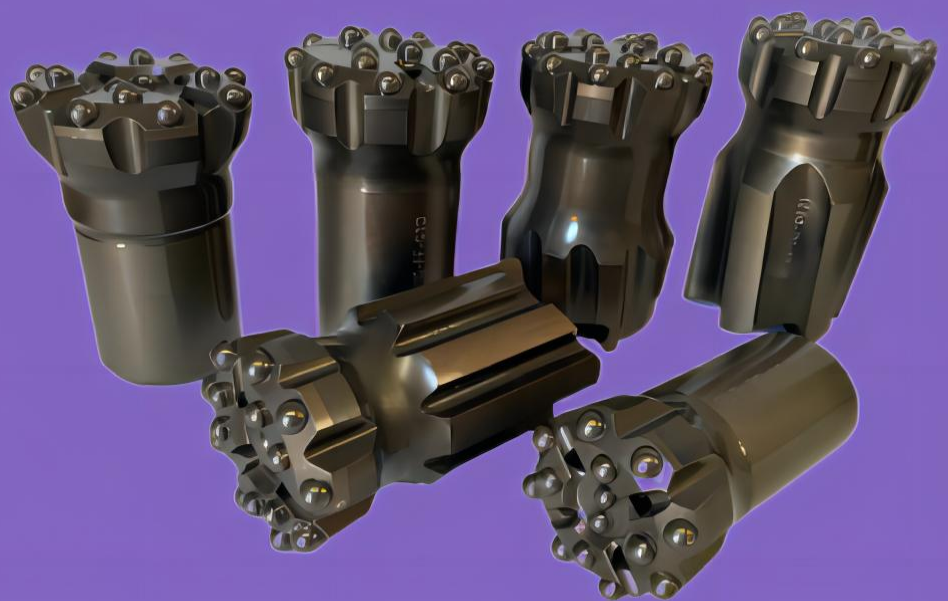

DTH HAMMER




Ausrock Drilling Tools is established in 2023 by a group of passionate drilling professionals. With a combined experience of over 50 years, our team specializes in Drilling Consumables for production drilling and mining. At Ausrock, we understand how important reliable and efficient drilling is to your project. Formed by highly experienced ex-drillers and industry-leading innovators, our team is committed to providing our customers with the most suitable and productive drilling tools. Quick response, professional advice, and quality service make Ausrock different and unique in the market.

DTH HAMMER


Selecting the Right Hammer

Selecting the right hammer for your DTH drilling is largely determined by the hole size and the type of rock formation. Ausrock is proudly offering a full range of blast hole drilling hammers for your selection. Welcome to Ausrock's three series of hammer models. Our AR Short Shank, standard valved and valveless hammers are designed and built with their own features and suits for a variety of drilling applications and conditions. Our AR Short Shank valveless hammers are gaining more popularity and favour from our users because they are faster, lighter and more service friendly with longer drilling life.

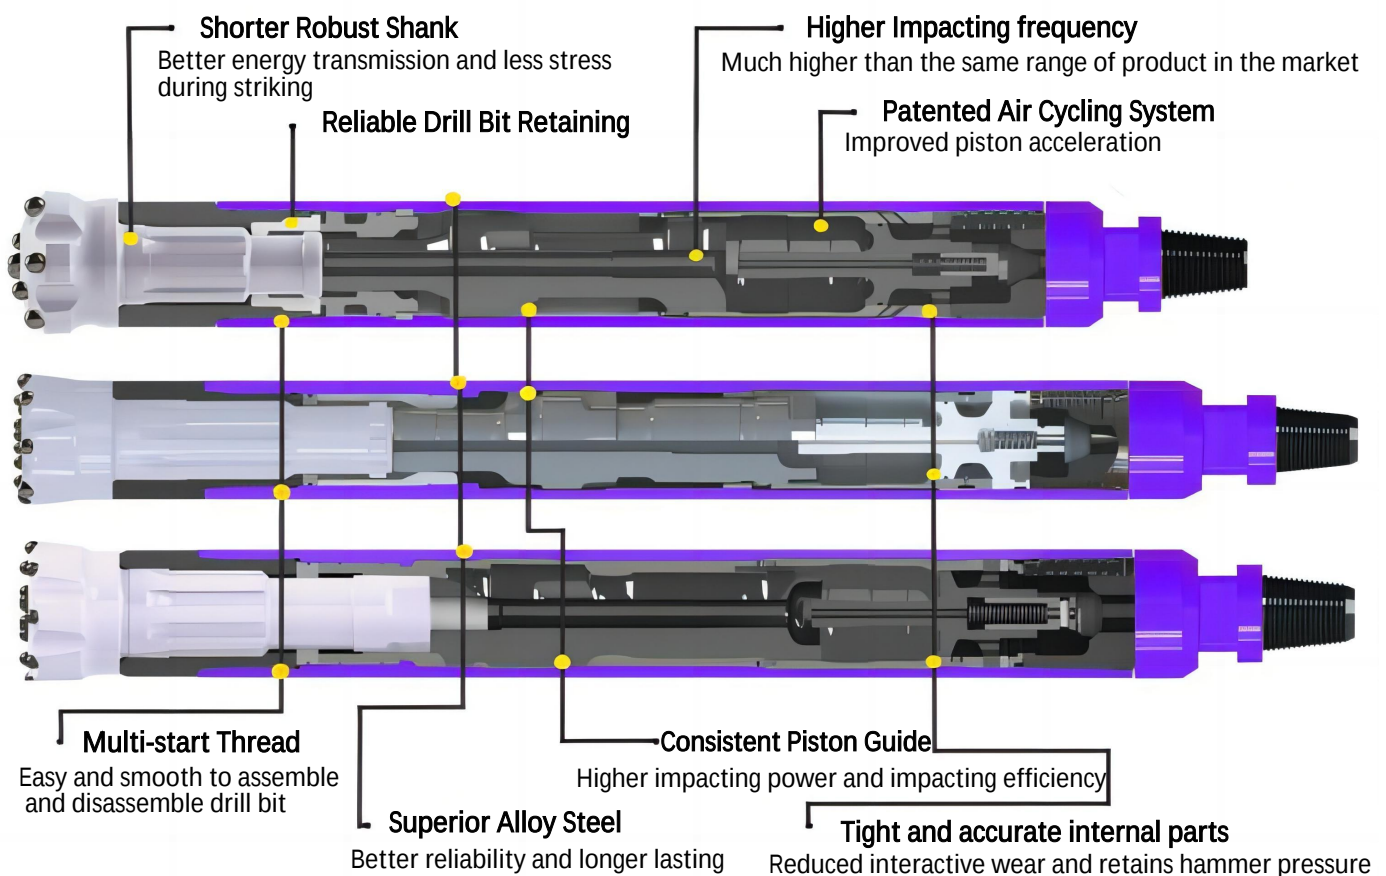


DTH HAMMER

Ausrock Hammer Overview

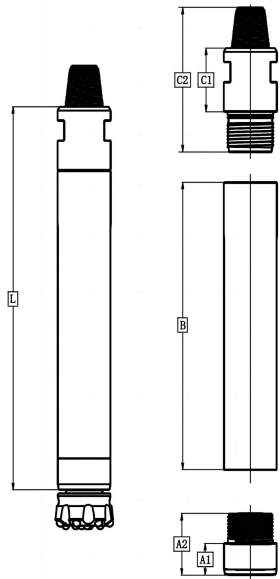

Technical Specification									
Hammer Model	Hammer OD (mm)	Effective Length L (mm)	Hole Size (mm)	Top Sub			Drive Chuck		
				C1(mm)	C2(mm)	Thread	A1(mm)	A2(mm)	Work Pressure (bar)
3" AR3-SS	80	738	89-110	76	205	2 3/8" API REG	45	105	AR3-SS 8-25
AR3-IR3.5N	80	863	89-110	82	224		50	120	IR3.5N 8-30
AR3-IR3.5	80	808	89-110	82	224		50	120	IR3.5 8-30
4" AR4-SS	101	789	115-127	125.6	256	2 3/8" API REG	50	113	AR4-SS 8-25
AR4-DHD340N	101	936	115-127	87	235		67	152.5	DHD340N 8-30
AR4-DHD340	101	881	115-127	87	235		67	152.5	DHD340 8-30
5" AR5-SS	127.5	883	140-165	150	319	3 1/2" API REG	68	136	AR5-SS 8-25
AR5-QL50N	126	1043	140-165	118	303		67	152	QL50N 8-30
AR5-QL50	126	990	140-165	118	303		67	152	QL50 8-30
6" AR6-SS	148	946	165-203	120.5	300	3 1/2" API REG	70	152.5	AR6-SS 8-25
AR6-QL60N	146	1131	165-203	125	330		74	158	QL60N 8-30
AR6-QL60	146	1080	165-203	125	330		74	158	QL60 8-30
8" AR8-SS	185	1132	203-254	134.5	355	4 1/2" API REG	69	177	AR8-SS 8-25
AR8-QL80N	185	1300	203-254	133	353.5		85	195	QL80N 8-30
AR8-QL80	185	1211	203-254	133	353.5		85	195	QL80 8-30


Ausrock Hammer Air Consumption Guide

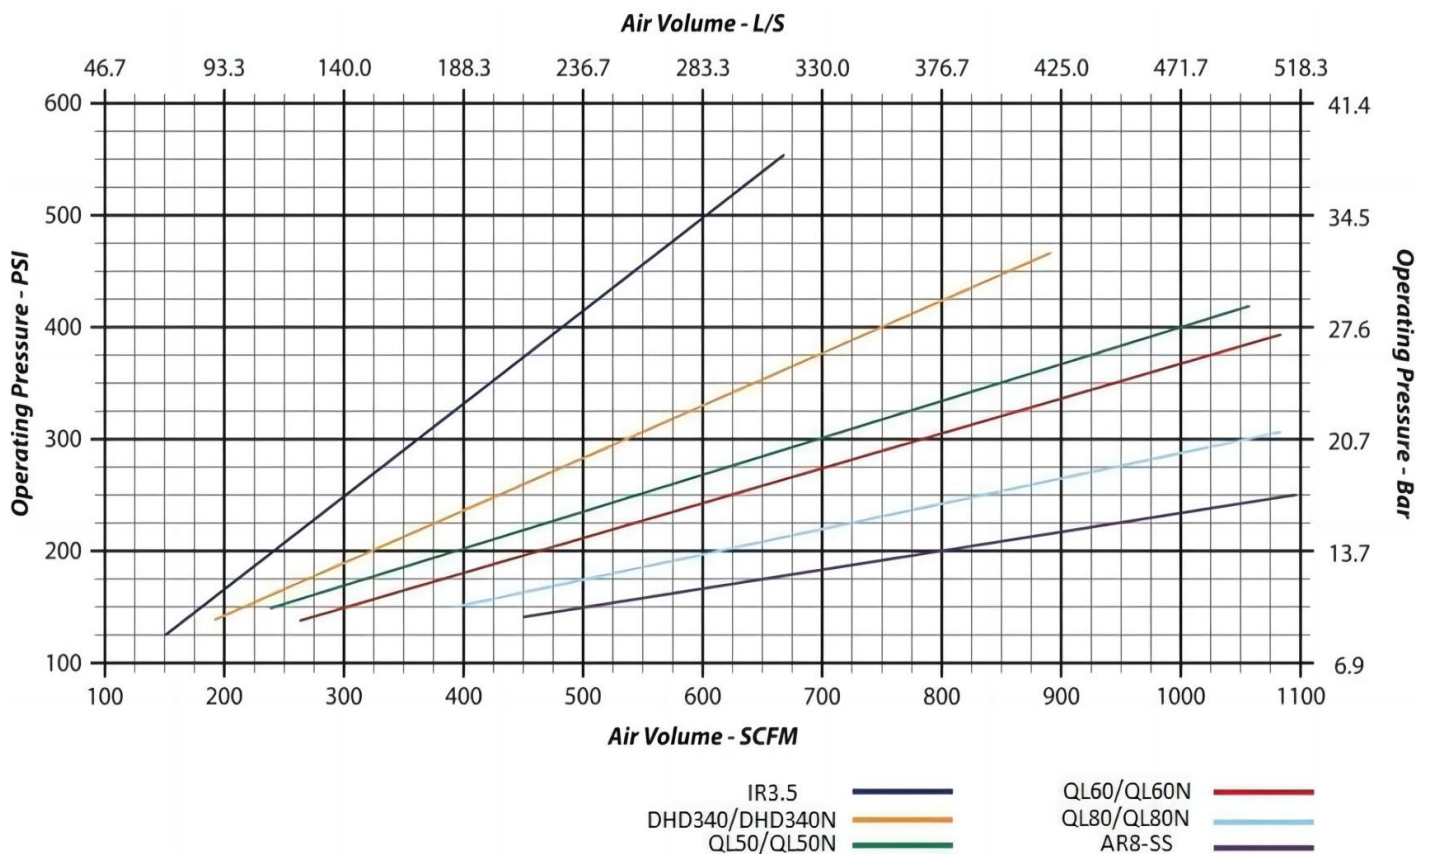

DTH HAMMER

3" SHORT SHANK RANGE

HAMMER	AR3-SS		HAMMER 3IN VALVELESS SHORT SHANK		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
738mm	2 3/8" API REG	Ø80mm	AR3-SS	Ø89mm– 110mm	19kg

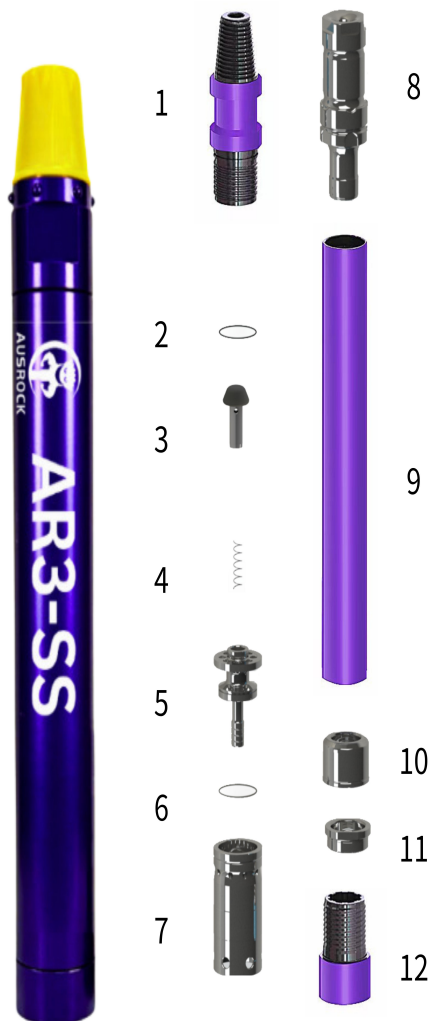

	Replacement Parts	Weight (kg)	Part No.
01	Top Sub: 2 3/8" API REG	3.52	AR3-SS-TS
02	Top Sub O-Ring	0.01	AR3-SS-TS-ORING
03	Check Valve	0.02	AR3-SS-CV
04	Spring	0.02	AR3-SS-SPRING
05	Air Distributor	0.66	AR3-SS-AD
06	Air Distributor O-Ring	0.01	AR3-SS-AD-ORING
07	Inner Cylinder	1.02	AR3-SS-IC
08	Piston	4.59	AR3-SS-PISTON
09	Outer Cylinder	6.43	AR3-SS-OC
10	Guide Bush	0.87	AR3-SS-GB
11	Bit Retainer Ring	0.16	AR3-SS-RETAINER
12	Drive Chuck	1.68	AR3-SS-DCHUCK
	Seal Kit	0.02	AR3-SS-SKIT

DTH HAMMER

3" DHD RANGE

HAMMER	AR3- IR3.5N		HAMMER 3IN VALVELESS IR3.5		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
863mm	2 3/8" API REG	Ø80mm	AR3- IR3.5N	Ø89mm–110mm	23kg

	1	9	01	Top Sub: 2 3/8"API REG	5.08	AR3-IR3.5N-TS
	2		02	Top Sub O-Ring	0.01	AR3-IR3.5N-TS-ORING
	3		03	Check Valve	0.14	AR3-IR3.5N-CV
	4		04	Spring	0.02	AR3-IR3.5N-SPRING
	5		05	Steel Washer	0.20	AR3-IR3.5N-SW
	6		06	Air Distributor	0.82	AR3-IR3.5N-AD
	7		07	Air Distributor O-Ring	0.01	AR3-IR3.5N-AD-ORING
	8	10	08	Inner Cylinder	1.20	AR3-IR3.5N-IC
			09	Piston	5.27	AR3-IR3.5N-PISTON
			10	Outer Cylinder	9.10	AR3-IR3.5N-OC
			11	Guide Bush	0.82	AR3-IR3.5N-GB
		11	12	Bit Retainer	0.12	AR3-IR3.5N-RETAINER
		12	13	Bit Retainer O-Ring	0.01	AR3-IR3.5N-BR-ORING
		13	14	Drive Chuck	1.79	AR3-IR3.5N-DCHUCK
		14				

Seal Kit		0.03	AR3-IR3.5N-SKIT
----------	--	------	-----------------

DTH HAMMER

3"DHD RANGE

HAMMER	AR3- IR3.5	HAMMER 3IN VALVED IR3.5			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
808mm	2 3/8" API REG	Ø80mm	AR3- IR3.5	Ø89mm–110mm	22.61kg

			Replacement Parts	Weight (kg)	Part No	
	1		9			
	2					
	3					
	4					
	5		10			
	6					
	7					
	8		11			
			12			
			13			
				Seal Kit	0.03	AR3-IR3.5-SKIT

DTH HAMMER

4" SHORT SHANK RANGE

HAMMER	AR4-SS		HAMMER 4IN VALVELESS SHORT SHANK		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
789mm	2 3/8" API REG	Ø101mm	AR4-SS	Ø115mm–127mm	33kg

Replacement Parts		Weight (kg)	Part No
01	Top Sub: 2 3/8" API REG	6.67	AR4-SS-TS
02	O-Ring	0.01	AR4-SS-TS-ORING
03	Check Valve	0.15	AR4-SS-CV
04	Spring	0.02	AR4-SS-SPRING
05	Air Distributor	1.70	AR4-SS-AD
06	Air Distributor O-Ring	0.01	AR4-SS-AD-ORING
07	Inner Cylinder	1.54	AR4-SS-IC
08	Piston	7.95	AR4-SS-PISTON
09	Outer Cylinder	9.31	AR4-SS-OC
10	Guide Bush	1.31	AR4-SS-BUSH
11	Bit Retainer	0.68	AR4SS-RETAINER
12	Drive Chuck	3.45	AR4SS-DCHUCK
Seal Kit		0.02	AR4SS-SKIT



DTH HAMMER

4"DHD RANGE					
HAMMER	AR4- DHD340N		HAMMER 4IN VALVELESS DHD340		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
936mm	2 3/8" API REG	Ø101mm	AR4-DHD340N	Ø115mm–127mm	40.5kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 2 3/8"API REG	7	AR4-DHD340N-TS
02	Top Sub O-Ring	0.01	AR4-DHD340N-TS-ORING
03	Check Valve	0.30	AR4-DHD340N-CV
04	Spring	0.05	AR4-DHD340N-SPRING
05	Steel Washer	0.27	AR4-DHD340N-SW
06	Air Distributor	1.4	AR4-DHD340N-AD
07	Air Distributor O-Ring	0.01	AR4-DHD340N-AD-ORING
08	Inner Cylinder	2	AR4-DHD340N-IC
09	Piston	9.04	AR4-DHD340N-PISTON
10	Outer Cylinder	15.7	AR4-DHD340N-OC
11	Guide Bush	1.05	AR4-DHD340N-BUSH
12	Bit Retainer	0.21	AR4-DHD340N-RETAINER
13	Bit Retainer O-Ring	0.01	AR4-DHD340N-BR-ORING
14	Drive Chuck	3.57	AR4-DHD340N-DCHUCK
	Seal Kit	0.03	AR4-DHD340N-SKIT

DTH HAMMER

4"DHD RANGE

HAMMER	AR4-DHD340		HAMMER 4IN VALVED DHD340		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
881mm	2 3/8" API REG	Ø101mm	AR4-DHD340	Ø115mm–127mm	38kg



	Replacement Parts	Weight (kg)	Part No.
01	Top Sub: 2 3/8"API REG	7	AR4-DHD340-TS
02	Top Sub O-Ring	0.01	AR4-DHD340-TS-ORING
03	Check Valve	0.30	AR4-DHD340-CV
04	Spring	0.05	AR4-DHD340-SPRING
05	Steel Washer	0.27	AR4-DHD340-SW
06	Air Distributor	1.4	AR4-DHD340-AD
07	Air Distributor O-Ring	0.01	AR4-DHD340-AD-ORING
08	Inner Cylinder	2	AR4-DHD340-IC
09	Piston	8.7	AR4-DHD340-PISTON
10	Outer Cylinder	15	AR4-DHD340-OC
11	Bit Retainer	0.34	AR4-DHD340-RETAINER
12	Bit Retainer O-Ring	0.01	AR4-DHD340-BR-ORING
13	Drive Chuck	4	AR4-DHD340-DCHUCK
	Seal Kit	0.03	AR4-DHD340-SKIT

DTH HAMMER

5" SHORT SHANK RANGE					
HAMMER	AR5-SS		HAMMER 5IN VALVELESS SHORT SHANK		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
883mm	3 1/2" API REG	Ø127.5mm	AR5-SS	Ø140mm–165mm	61kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 3 1/2" API REG	10.05	AR5-SS-TS
02	O-Ring	0.01	AR5-SS-ORING
03	Check Valve	0.16	AR5-SS-CV
04	Spring	0.02	AR5-SS-SPRING
05	Air Distributor	1.72	AR5-SS-AD
06	O-Ring	0.01	AR5-SS-ORING
07	Internal Cylinder	2.70	AR5-SS-IC
08	Piston	13.40	AR5-SS-PISTON
09	Outer Cylinder	18.40	AR5-SS-OC
10	Guide Bush	2.50	AR5-SS-BUSH
11	Bit Retainer Ring	1.00	AR5-SS-RETAINER
12	Drive Chuck	6.00	AR5-SS-DCHUCK
	Seal Kit	0.02	AR5-SS-SKIT

DTH HAMMER

5" QL RANGE					
HAMMER	AR5-QL50N		HAMMER 5IN VALVELESS QL50		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1043mm	3 1/2" API REG	Ø126mm	AR5-QL50N	Ø140mm–165mm	73kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 3 1/2" API REG	19.0	AR5-QL50N-TS
02	Top Sub O-Ring	0.01	AR5-QL50N-TS-ORING
03	Check Valve	0.30	AR5-QL50N-CV
04	Spring	0.05	AR5-QL50N-SPRING
05	Steel Washer	0.3	AR5-QL50N-SW
06	Air Distributor	2.82	AR5-QL50N-AD
07	Air Distributor O-Ring	0.01	AR5-QL50N-AD-ORING
08	Inner Cylinder	3.15	AR5-QL50N-IC
09	Piston	15.62	AR5-QL50N-PISTON
10	Outer Cylinder	27.45	AR5-QL50N-OC
11	Guide Bush	1.99	AR5-QL50N-BUSH
12	Retainer Sleeve	0.74	AR5-QL50N-RS
13	Bit Retainer	0.33	AR5-QL50N-RETAINER
14	Bit Retainer O-Ring	0.01	AR5-QL50N-RS-ORING
15	Drive Chuck	5.27	AR5-QL50N-DCHUCK
	Seal Kit	0.03	AR5-QL50N-SKIT

DTH HAMMER

5" QL RANGE					
HAMMER	AR5-QL50		HAMMER 5IN VALVED QL50		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
990mm	3 1/2" API REG	Ø126mm	Ø126mm	Ø127mm–165mm	74kg



Replacement Parts	Weight (kg)	Part No
01 Top Sub: 3 1/2"API REG	19.5	AR5-QL50-TS
02 Top Sub O-Ring	0.01	AR5-QL50-TS-ORING
03 Check Valve	0.30	AR5-QL50-CV
04 Spring	0.05	AR5-QL50-SPRING
05 Steel Washer	0.27	AR5-QL50-SW
06 Air Distributor	2.82	AR5-QL50-AD
07 Air Distributor O-RING	0.01	AR5-QL50-AD-ORING
08 Inner Cylinder	3.15	AR5-QL50-IC
09 Piston	15.13	AR5-QL50-PISTON
10 Outer Cylinder	25.11	AR5-QL50-OC
11 Retainer Sleeve	0.59	AR5-QL50-RS
12 Bit Retainer	0.33	AR5-QL50-RETAINER
13 Bit Retainer O-Ring	0.01	AR5-QL50-RETAINER-ORING
14 Drive Chuck	6.96	AR5-QL50-DCHUCK
Seal Kit	0.03	AR5-QL50-SKIT

DTH HAMMER

6" SHORT SHANK RANGE

HAMMER	AR6-SS	HAMMER 6IN VALVELESS SHORT SHANK			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
946mm	3 1/2" API REG	Ø148mm	AR6-SS	Ø165mm–203mm	95kg

Replacement Parts		Weight (kg)	Part No
01	Top Sub: 3 1/2" API REG	18.90	AR6-SS-TS
02	Top Sub O-Ring	0.01	AR6-SS-TS-ORING
03	Check Valve	0.80	AR6-SS-CV
04	Spring	0.05	AR6-SS-SPRING
05	Air Distributor	3.73	AR6-SS-AD
06	Air Distributor O-Ring	0.01	AR6-SS-AR-ORING
07	Inner Cylinder	4.37	AR6-SS-IC
08	Piston	20.80	AR6-SS-PISTON
09	Outer Cylinder	25.20	AR6-SS-OC
10	Guide Bush	3.55	AR6-SS-BUSH
11	Bit Retainer	1.41	AR6-SS-RETAINER
12	Drive Chuck	7.75	AR6-SS-DCHUCK
Seal Kit		0.02	AR6-SS-SKIT

DTH HAMMER

6" QL RANGE

HAMMER	AR6-QL60N	HAMMER 6IN VALVELESS QL60			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1131mm	3 1/2" API REG	Ø146mm	AR6-QL60N	Ø165mm–203mm	108kg



Replacement Parts		Weight (kg)	Part No
01	Top Sub: 3 1/2" API REG	22.14	AR6-QL60N-TS
02	Top Sub O-Ring	0.01	AR6-QL60N-TS-ORING
03	Check Valve	0.80	AR6-QL60N-CV
05	Spring	0.05	AR6-QL60N-SPRING
05	Compression Buffer	0.35	AR6-QL60N-CB
06	Steel Washer	0.28	AR6-QL60N-SW
07	Air Distributor	3.52	AR6-QL60N-AD
08	Air Distributor O-Ring	0.01	AR6-QL60N-AD-ORING
09	Inner Cylinder	4.45	AR6-QL60N-IC
10	Piston	24.12	AR6-QL60N-PISTON
11	Outer Cylinder	33.42	AR6-QL60N-OC
12	Guide Bush	2.92	AR6-QL60N-BUSH
13	Retainer Sleeve	1.20	AR6-QL60N-RS
14	Bit Retainer Ring	0.58	AR6-QL60N-RETAINER
15	Bit Retainer O-Ring	0.01	AR6-QL60N-BR-ORING
16	Drive Chuck	7.27	AR6-QL60N-DCHUCK
Seal Kit		0.03	AR6-QL60N-SKIT

DTH HAMMER

6" QL RANGE

HAMMER		HAMMER 6IN VALVED QL60			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1080mm	3 1/2" API REG	Ø146mm	AR6-QL60	Ø165mm–203mm	110kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 3 1/2"API REG	22.14	AR6-QL60-TS
02	Top Sub O-Ring	0.01	AR6-QL60-TS-ORING
03	Check Valve	0.80	AR6-QL60-CV
04	Spring	0.05	AR6-QL60-SPRING
05	Compression Buffer	0.35	AR6-QL60-CB
06	Steel Washer	0.28	AR6-QL60-SW
07	Air Distributor	3.52	AR6-QL60-AD
08	Air Distributor O-Ring	0.01	AR6-QL60-AD-ORING
09	Inner Cylinder	4.45	AR6-QL60-IC
10	Piston	23.58	AR6-QL60-PISTON
11	Outer Cylinder	30.52	AR6-QL60-OC
12	Retainer Sleeve	1.20	AR6-QL60-RS
13	Bit Retainer	0.58	AR6-QL60-RETAINER
14	Bit Retainer O-Ring	0.01	AR6-QL60-BR-ORING
15	Drive Chuck	7.28	AR6-QL60-DCHUCK
	Seal Kit	0.03	AR6-QL60-SKIT

DTH HAMMER

8" SHORT SHANK RANGE

HAMMER	AR8-SS	HAMMER 8IN VALVELESS SHORT SHANK			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1132mm	4 1/2" API REG	Ø185mm	AR8-SS	Ø203mm–254mm	170kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 4 1/2" API REG	40.48	AR8-SS-TS
02	Top Sub O-Ring	0.01	AR8-SS-TS-ORING
03	Check Valve	0.80	AR8-SS-CV
04	Spring	0.05	AR8-SS-SPRING
05	Air Distributor	6.72	AR8-SS-AD
06	Air Distributor O-Ring	0.01	AR8-SS-AD-ORING
07	Inner Cylinder	8.05	AR8-SS-IC
08	Piston	44.5	AR8-SS-PISTON
09	Outer Cylinder	50.00	AR8-SS-OC
10	Guide Bush	4.57	AR8-SS-BUSH
11	Bit Retainer	1.41	AR8-SS-RETAINER
12	Drive Chuck	13.40	AR8-SS-DCHUCK
	Seal Kit	0.02	AR8-SS-SKIT

DTH HAMMER

8" QL RANGE					
HAMMER	AR8-QL80N		HAMMER 8IN VALVELESS QL80		
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1300mm	4 1/2" API REG	Ø185mm	AR8-QL80N	Ø203mm–254mm	193.5kg



	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 4 1/2" API REG	40.48	AR8-QL80N-TS
02	O-Ring	0.01	AR8-QL80N-ORING
03	Check Valve	0.80	AR8-QL80N-CV
04	Spring	0.05	AR8-QL80N-SPRING
05	Compression Buffer	0.80	AR8-QL80N-CB
06	Air Distributor	8.15	AR8-QL80N-AD
07	Air Distributor O-Ring	0.01	AR8-QL80N-AD-ORING
08	Internal Cylinder	7.30	AR8-QL80N-IC
09	Piston	45.72	AR8-QL80N-PISTON
10	Outer Cylinder	64.97	AR8-QL80N-OC
11	Guide Bush	4.20	AR8-QL80N-BUSH
12	Retainer Sleeve	1.88	AR8-QL80N-RS
13	Bit Retainer	1.52	AR8-QL80N-RETAINER
14	Bit Retainer O-Ring	0.01	AR8-QL80N-BR-ORING
15	Drive Chuck	18.21	AR8-QL80N-DCHUCK
	Seal Kit	0.03	AR8-QL80N-SKIT

DTH HAMMER

8" QL RANGE

HAMMER	AR8-QL80	HAMMER 8IN VALVED QL80			
Hammer Length	Top Sub Connection	Hammer OD	Shank Type	Hole Size	Total Weight
1211mm	4 1/2" API REG	Ø185mm	AR8-QL80	Ø203mm–254mm	182kg




	Replacement Parts	Weight (kg)	Part No
01	Top Sub: 4 1/2" API REG	40.48	AR8-QL80-TS
02	O-Ring	0.01	AR8-QL80-ORING
03	Check Valve	0.80	AR8-QL80-CV
04	Spring	0.05	AR8-QL80-SPRING
05	Steel Washer	1.13	AR8-QL80-SW
06	Compression Buffer	0.80	AR8-QL80-CB
07	Air Distributor	8.15	AR8-QL80-AD
08	O-Ring	0.01	AR8-QL80-ORING
09	Internal Cylinder	7.30	AR8-QL80-IC
10	Piston	45.72	AR8-QL80-PISTON
11	Outer Cylinder	64.97	AR8-QL80-OC
12	Retainer Sleeve	1.88	AR8-QL80N-RS
13	Bit Retainer Ring	1.52	AR8-QL80N-RETAINER
14	Bit Retainer O-Ring	0.01	AR8-QL80-BR-ORING
15	Drive Chuck	18.21	AR8-QL80N-DCHUCK
	Seal Kit	0.03	AR8-QL80-SKIT

DTH DRILL BIT



Selecting the Right Bit

Ausrock has a comprehensive range of DTH drill bits to suit all blast hole applications. Our DTH bits are manufactured from high quality alloy steel and have been designed, machined and heat treated using the latest technology to the highest standard to produce a reliable and dependable product. We understand that bit life and rate of penetration are the most important criteria in selecting the right bit for a particular application. Speak to your Ausrock sales representative to discuss your drilling needs.

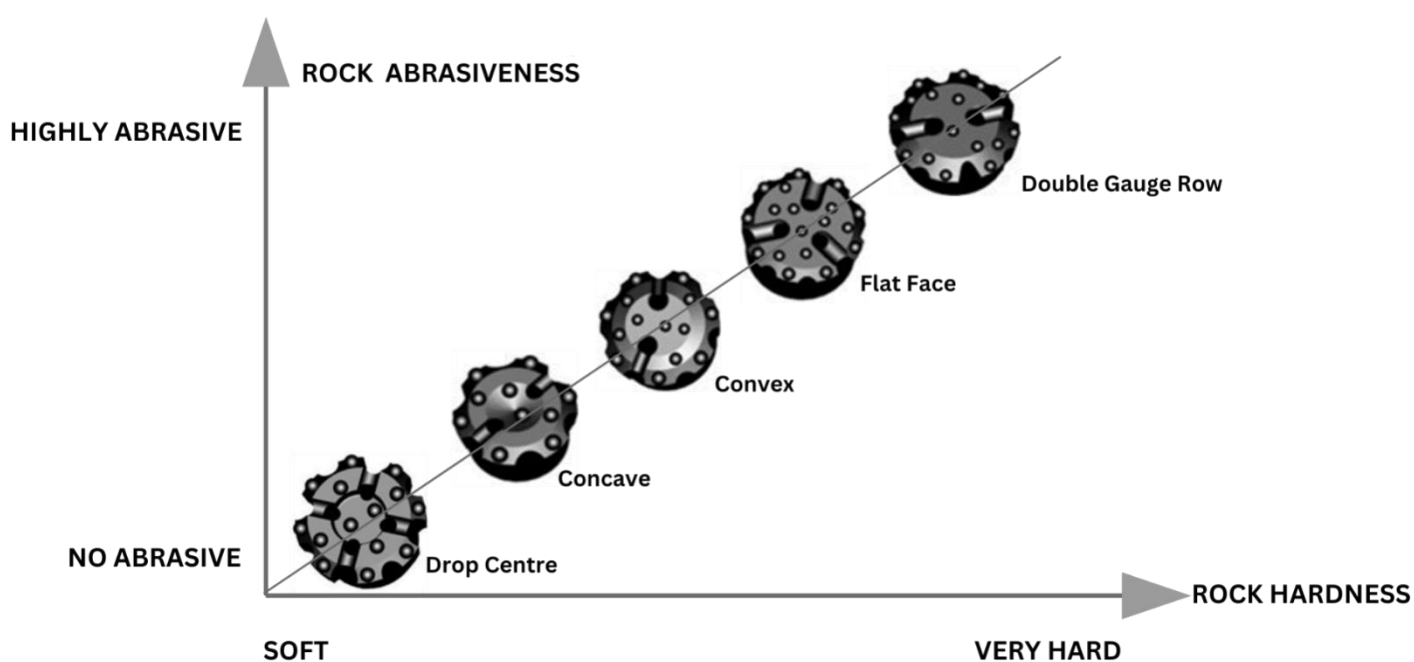

DTH DRILL BIT

Bit Face Shape Selection



**Drop
Centre**

For high penetration rates in soft to medium hard and fissured rock formations. Low to medium air pressures. Maximum hole deviation control.



Flat Face

This kind of face shape is suitable for hard to very hard and abrasive rock formations in applications with high air pressures. Good penetration rates and resistance to steel wash.



Concave

The all-round application bit face specifically for medium hard and homogenous rock formations. Good hole deviation and good flushing capacity.



Convex

For high penetration rates in soft to medium-hard with low to medium air pressures. It is the most resistance to steel wash and may reduce the load and wear on the gauge buttons. However, it has poor hole deviation control.



**Double
Gauge
Row
(DGR)**

This kind of face shape is suitable for fast penetration rates in medium to hard rock formations. Designed for high air pressures and good resistance to steel wash step gauge bit.

Carbide Button Shape Selection



Round Button



**Semi-Ballistic
Buttons**



Ballistic Button



Flat Button




Sharp Button

DTH DRILL BIT

DTH DRILL BIT RANGE			WEIGHT(KGS)
3"	AR3-IR3.5-89-FF	BIT 89MM FLAT FACE IR3.5	4.65
	AR3-IR3.5-89-DC	BIT 89MM DROP CENTRE IR3.5	4.65
	AR3-IR3.5-102-FF	BIT 102MM FLAT FACE IR3.5	6.70
	AR3-IR3.5-102-DC	BIT 102MM DROP CENTRE AR3.5	6.70
4"	AR4-DHD340-115-FF	BIT 115MM FLAT FACE DHD340	8.20
	AR4-DHD340-115-DC	BIT 115MM DROP CENTRE DHD340	8.20
	AR4-DHD340-127-FF	BIT 127MM FLAT FACE DHD340	9.50
	AR4-DHD340-127-DC	BIT 127MM DROP CENTRE DHD340	9.50
	AR4-SS--115-FF	BIT 115MM FLAT FACE SHORT SHANK	6.65
	AR4-SS-115-DC	BIT 115MM DROP CENTRE SHORT SHANK	6.65
	AR4-SS-127-FF	BIT 127MM FLAT FACE SHORT SHANK	7.55
	AR4-SS-127-DC	BIT 127MM DROP CENTRE SHORT SHANK	7.55
5"	AR5-QL50-140-FF	BIT 140MM FLAT FACE QL50	14.85
	AR5-QL50-140-DC	BIT 140MM DROP CENTRE QL50	14.85
	AR5-SS-140-FF	BIT 140MM FLAT FACE SHORT SHANK	12.20
	AR5-SS-140-DC	BIT 140MM DROP CENTRE SHORT SHANK	12.20
6"	AR6-QL60-165-FF	BIT 165MM FLAT FACE QL60	24.00
	AR6-QL60-165-DC	BIT 165MM DROP CENTRE QL60	24.00
	AR6-QL60-203-FF	BIT 203MM FLAT FACE QL60	29.50
	AR6-QL60-203-DC	BIT 203MM DROP CENTRE QL60	29.50
	AR6-SS-165-FF	BIT 165MM FLAT FACE SHORT SHANK	19.55
	AR6-SS-165-DC	BIT 165MM DROP CENTRE SHORT SHANK	19.55
	AR6-SS-203-FF	BIT 203MM FLAT FACE SHORT SHANK	45.00
	AR6-SS-203-DC	BIT 203MM DROP CENTRE SHORT SHANK	45.00
8"	AR8-QL80-203-DC	BIT 203MM DROP CENTRE QL80	51.50
	AR8-QL80-229-FF	BIT 229MM FLAT FACE QL80	57.50
	AR8-QL80-229-DC	BIT 229MM DROP CENTRE QL80	57.50
	AR8-SS-203-FF	BIT 203MM FLAT FACE SHORT SHANK	45.00
	AR8-SS-203-DC	BIT 203MM DROP CENTRE SHORT SHANK	45.00
	AR8-SS-229-FF	BIT 229MM FLAT FACE SHORT SHANK	50.00
	AR8-SS-229-DC	BIT 229MM DROP CENTRE SHORT SHANK	50.00

DTH DRILL PIPE

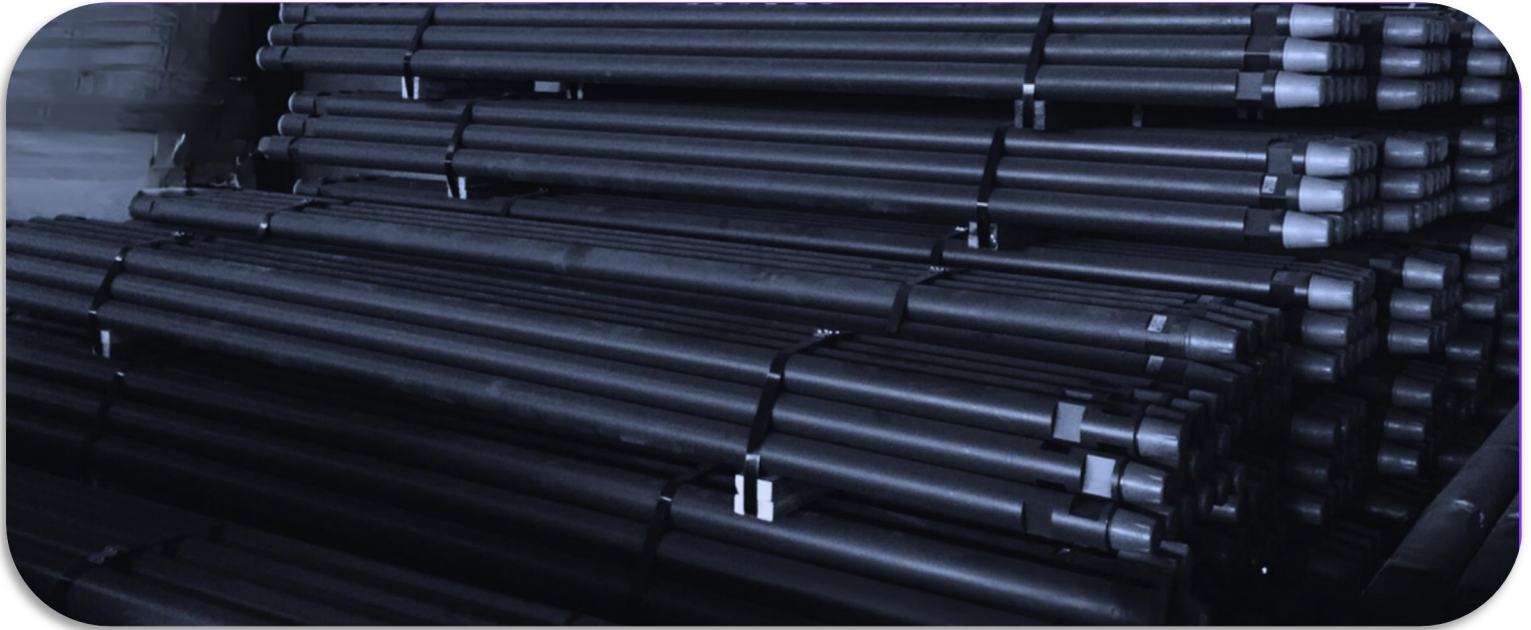

Ausrock has a large range of DTH drill pipes for selection for your blast hole operation. Our DTH drill pipes are manufactured from high quality alloy steel and have been machined and heat treated to meet the intensive requirement on threads. Drill pipe thread life and reliability are the most important criteria in selecting the right products. Speak to your Ausrock sales representative to discuss your drilling needs.



TOP HAMMER



T51 BITS			WEIGHT(KGS)
89MM	T51-89-DC-STD	T51 89MM DC STANDARD BUTTON BIT	4.20
	T51-89-FF-STD	T51 89MM FF STANDARD BUTTON BIT	4.20
	T51-89-DC-RETRAC	T51 89MM DC RETRAC BUTTON BIT	4.70
	T51-89-FF- RETRAC	T51 89MM FF RETRAC BUTTON BIT	4.70
102MM	T51- 102- DC-STD	T51 102MM DC STANDARD BUTTON BIT	5.50
	T51- 102- FF-STD	T51 102MM FF STANDARD BUTTON BIT	5.50
	T51- 102- DC- RETRAC	T51 102MM DC RETRAC BUTTON BIT	6.05
	T51- 102- FF - RETRAC	T51 102MM FF RETRAC BUTTON BIT	6.05
115MM	T51- 115- DC-STD	T51 115MM DC STANDARD BUTTON BIT	6.40
	T51- 115- FF-STD	T51 115MM FF STANDARD BUTTON BIT	6.40
	T51- 115- DC- RETRAC	T51 115MM DC RETRAC BUTTON BIT	9.60
	T51- 115- FF-RETRAC	T51 115MM FF RETRAC BUTTON BIT	9.60
127MM	T51- 127- DC-STD	T51 127MM DC STANDARD BUTTON BIT	10.50
	T51- 127- FF-STD	T51 127MM FF STANDARD BUTTON BIT	10.50
	T51- 127- DC- RETRAC	T51 127MM DC RETRAC BUTTON BIT	13.50
	T51- 127- FF-RETRAC	T51 127MM FF RETRAC BUTTON BIT	13.50

TOP HAMMER

EL60 BITS			WEIGHT(KGS)
92MM	EL60-92-DC-STD	EL60 92MM DC STANDARD BUTTON BIT	4.70
	EL60-92-FF-STD	EL60 92MM FF STANDARD BUTTON BIT	4.70
	EL60-92-DC- RETRAC	EL60 92MM DC RETRAC BUTTON BIT	5.20
	EL60-92-FF- RETRAC	EL60 92MM FF RETRAC BUTTON BIT	5.20
102MM	EL60- 102- DC-STD	EL60 102MM DC STANDARD BUTTON BIT	5.70
	EL60- 102- FF-STD	EL60 102MM FF STANDARD BUTTON BIT	5.70
	EL60- 102- DC-RETRAC	EL60 102MM DC RETRAC BUTTON BIT	6.55
	EL60- 102- FF- RETRAC	EL60 102MM FF RETRAC BUTTON BIT	6.55
115MM	EL60- 115- DC-STD	EL60 115MM DC STANDARD BUTTON BIT	6.90
	EL60- 115- FF-STD	EL60 115MM FF STANDARD BUTTON BIT	6.90
	EL60- 115- DC-RETRAC	EL60 115MM DC RETRAC BUTTON BIT	10.10
	EL60- 115- FF- RETRAC	EL60 115MM FF RETRAC BUTTON BIT	10.10
127MM	EL60- 127- DC-STD	EL60 127MM DC STANDARD BUTTON BIT	11.00
	EL60- 127- FF-STD	EL60 127MM FF STANDARD BUTTON BIT	11.00
	EL60- 127- DC-RETRAC	EL60 127MM DC RETRAC BUTTON BIT	14.00
	EL60- 127- FF- RETRAC	EL60 127MM FF RETRAC BUTTON BIT	14.00
140MM	EL60- 140- DC-RETRAC	EL60 140MM DC RETRAC BUTTON BIT	9.40
152MM	EL60- 152- DC-RETRAC	EL60 152MM DC RETRAC BUTTON BIT	10.60

TOP HAMMER



TOP HAMMER DRILL ROD		
T51	T51-3.66-SR	T51 3.66 METER SPEED ROD
	T51-4.27-SR	T51 4.27 METER SPEED ROD
	T51-6.1-SR	T51 6.1 METER SPEED ROD
EL60	EL60-3.66-SR	EL60 3.66 METER SPEED ROD
	EL60-4.27-SR	EL60 4.27 METER SPEED ROD
	EL60-6.1-SR	EL60 6.1 METER SPEED ROD



Ausrock Drilling Tools Pty Ltd

Tel. 08 9302 5280

Web: www.ausrockdt.com

Email: accounts@ausrockdt.com

Add: 16 Mosey Street, Landsdale, WA 6065